

retigo®

Blast chillers/freezers

THE HEART OF THE MODERN KITCHEN



The following is characteristic of all models:

- Made of premium steel AISI 304
- Electronic, microprocessor control system
- Simple, intuitive operation
- Hygienic chamber with rounded inside corners
- Even temperature distribution inside the chamber
- Easily removable core probe for inside food temperature measuring
- Automatic switch to a conservation mode when the chilling/freezing cycle is finished

BC 511, BC 511 - ST, BC 1011, BC 1411, BC 2011

- Chilling from +70°C to +3°C in 90 min.
- Freezing from +70°C to -18°C in 230 min.
- SOFT and HARD chilling cycle
- Process automatically finished when required core temperature or preset time reached
- 99 programs
- Core temperature probe
- Acoustic signal when process finished
- Automatic de-freezing function


OPTIONAL:

- Heated core temperature probe
- UV sterilization lamp
- HACCP
- Loading trolley VO 2011 for BC 2011


retigo®

Blast chillers/freezers


SMART CHILL SOFTWARE selects the optimal chilling cycle automatically.

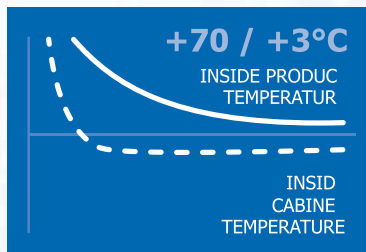


SOFT BLAST CHILLING

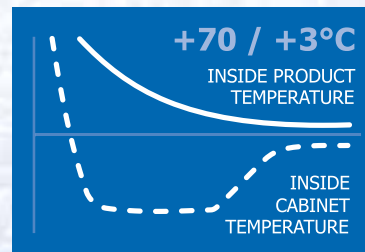

HARD BLAST CHILLING

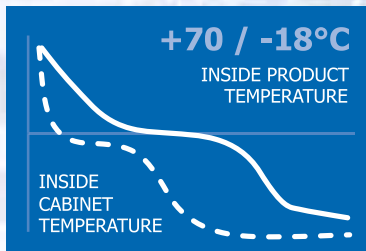

STANDARD SHOCK FREEZING

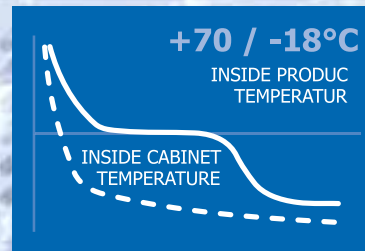

INTENSIVE SHOCK FREEZING

Model	BC 511	BC 511-ST	BC 1011	BC 1411	BC 2011
Capacity	5 x GN1/1	5 x GN1/1	10 x GN1/1	14 x GN1/1	20 x GN1/1
Chilling capacity	18 kg	18 kg	30 kg	50 kg	75 kg
Freezing capacity	9 kg	9 kg	20 kg	30 kg	42 kg
Spacing	70 mm	92 mm	75 mm	67 mm	
Dimensions (WxHxD)	784 x 900 x 800 mm	1250 x 850 x 700 mm	800 x 1800 x 825 mm	800 x 2025 x 825 mm	900 x 2180 x 1150 mm
Aggregate dimensions					950 x 550 x 700 mm
Total power	950 W	950 W	2500 W	3000 W	3200 W
Fuse protection	16 A	16 A	16 A	16 A	16 A
Voltage	1N~/230V/50Hz	1N~/230V/50Hz	3N~/400V/50Hz	3N~/400V/50Hz	3N~/400V/50Hz
Coolant	R 404 A	R 404 A	R 404 A	R 404 A	R 404 A

RETIGO Ltd.,

Láň 2310, PS 43, 756 64 Rožnov pod Radhoštěm, Czech Republic, tel/fax: +420 571 652 434, info@retigo.cz, www.retigo.com

THE HEART OF THE MODERN KITCHEN