




Mission

retigo®

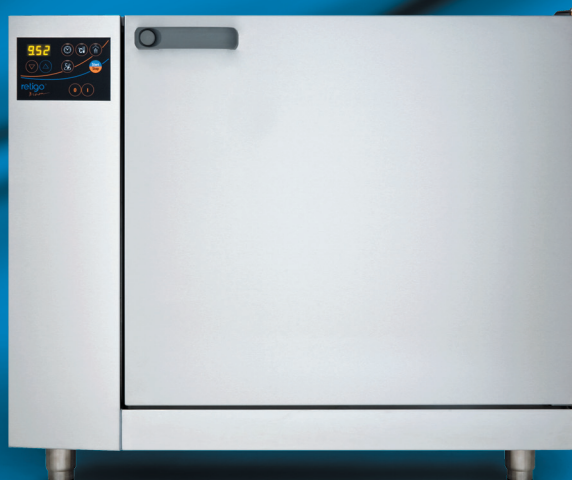

Regenerators/Holding cabinet

General characteristic

- Electronic, microprocessor control system
- Simple, intuitive operation with display of basic functions
- Hygienic cooking chamber with rounded inside corners
- Even baking thanks to the bi-directional fan
- Run-off tray under the door for collecting condensed water
- Removable door seal for easy maintenance
- Core temperature probe option
- SDS - service and diagnostic system
- automatic evaluation of microprocessor error reports
- IPX5 shield
- Made of premium stainless steel
- Possibility of sets 611/ RG(HC), RG(HC)/ RG(HC)

Model characteristic

RG 10i

- Hot air 30 - 140°C
- Time setting from 1 min. to 10 hrs.

i - injection

RG 10b

- Hot air 30 - 140°C
- Combination 30 - 140°C
- Steaming 99 - 130°C
- Bio steaming 30 - 98°C
- Time setting from 1 min. to 10 hrs.
- Moisture setting from 0 to 100%

b - boiler

HC 10i

- Hot air 30 - 90°C
- Combination 30 - 90°C
- Steaming 30 - 90°C
- Time setting from 1 min. to 10 hrs.
- Moisture setting from 0 to 100%

i - injection

Optional accessories


- ST 1116 - stainless steel stand with 16 trays GN1/1
- core temperature probe
- integrated shower
- HACCP set
- Gastro containers
- Water softners and filters

T
o
u
c
h
t
h
e
f
u
t
u
r
e



Model **RG 10i** , **RG 10b** a **HC 10i**

Drawings

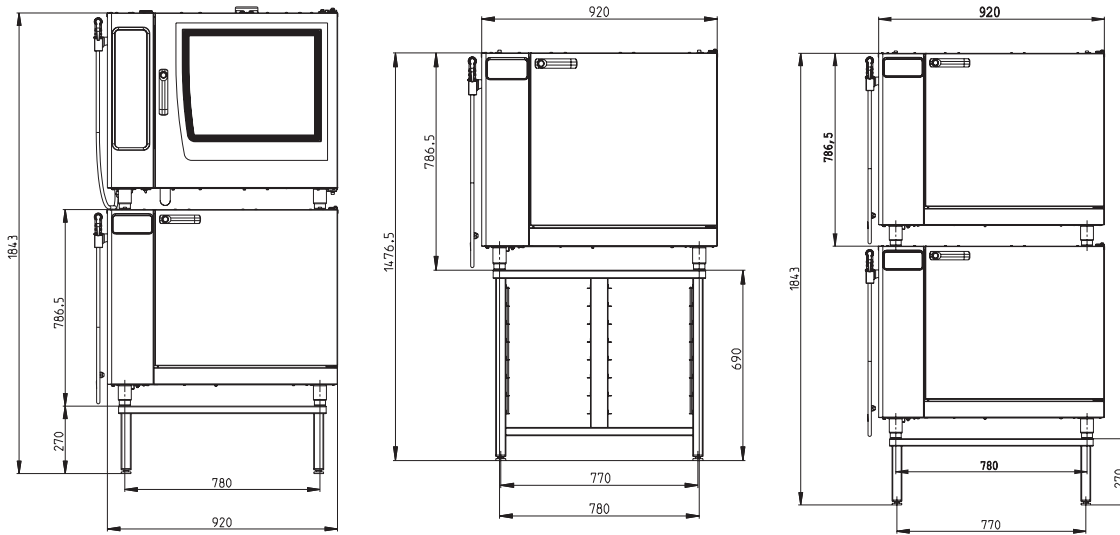

T
O
U
C
H
t
h
e
F
U
T
U
R
E

Model **RG 10i**

RG 10b

HC 10i technical specification

Energy	electricity	Energy	electricity	Energy	electricity
Steam generation	injection	Steam generation	boiler	Steam generation	injection
Capacity	10 trays GN1/1	Capacity	10 trays GN1/1	Capacity	10 trays GN1/1
Capacity of meals	200 - 300	Capacity of meals	200 - 300	Capacity of meals	200 - 300
Spacing [mm]	80	Spacing [mm]	80	Spacing [mm]	80
Dimensions (W x H x D) [mm]	920 x 787 x 790	Dimensions (W x H x D) [mm]	920 x 787 x 790	Dimensions (W x H x D) [mm]	920 x 787 x 790
Weight	140 kg	Weight	140 kg	Weight	140 kg
Total power	9.8 kW	Total power	9.8 kW	Total power	3.3 kW
Fuse protection	16A	Fuse protection	16A	Fuse protection	16A
Voltage	3N~/400V/50Hz	Voltage	3N~/400V/50Hz	Voltage	1N~/230V/50Hz
Water connection / drain [mm]	G 3/4" / 40 mm	Water connection / drain [mm]	G 3/4" / 40 mm	Water connection / drain [mm]	G 3/4" / 40 mm
Temperature	30 - 140°C	Temperature	30 - 140°C	Temperature	30 - 90°C

vision

retigo®

RETIGO Ltd.
Láň 2310, PS 43
Czech Republic
756 64 Rožnov pod Radhoštěm
tel.: +420 571 665 511
fax: +420 571 665 554
e-mail: sales@retigo.com
www.retigo.com